


Kompaktflansch-Kugelhahn PN 16, mit vollem Durchgang, TA-Luft Option: Atex geprüft, fire-safe, totraumfrei

1	Body	Gehäuse	A351-CF8M / A182-F316	1
2	End connection	Ring	A351-CF8M / A182-F316	1
3	Ball	Kugel	A351-CF8M / A182-F316	1
4	Ball seat	Kugeldichtung	P.T.F.E.	2
5	Ring	O-Ring	FKM (Viton)	1
6	Thrust washer	Spindelscheibe	P.T.F.E.	1
7	O-Ring	O-Ring	FKM (Viton)	1
8	Stem seat	Spindeldichtung	P.T.F.E.	1
9	Packing gland	Vorspannung	CARBON STEEL	1
10	End stop	Anschlagscheibe	INOX AISI 430*, CARBONSTEEL**	2-1
11	Spring washer	Tellerfeder	CARBON STEEL	2
12	Nut	Mutter	CARBON STEEL	2
13	Stem	Spindel	A182-F316	1
14	Handle	Handhebel	CARBON STEEL	1
15	Handle DN150-200	Handhebel DN150-200	CARBON STEEL	1
16	Screw	Schraube	CARBON STEEL	1
17	Screw	Schraube	CARBON STEEL	8-12
18	Body handle DN150-200	HABEL DN150-200	EN-GJL-250	1

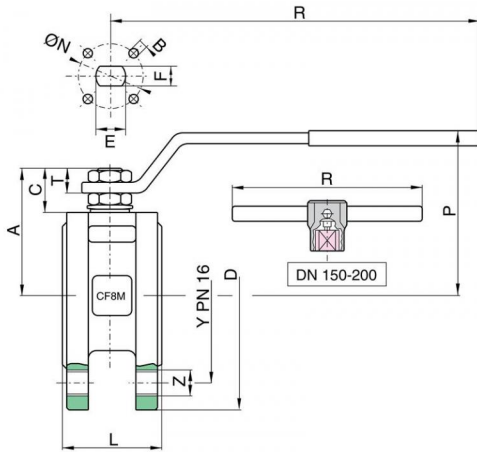

Size	Zoll	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"
D	mm	90	100	115	140	150	165	185	200	220	250	285	340
Y	mm	65	75	85	100	110	125	145	160	180	210	240	295
Z		4 X M12	4 X M12	4 X M12	4 X M16	4 X M16	4 X M16	4 X M16	8 X M16	8 X M16	8 X M16	8 X M20	12 x Ø22
L	mm	35	40	46	54	63,5	82	103	122	152	196	232	400
R	mm	131	131	174	174	250	250	321	321	381	381	700	700
P	mm	65	69	80	84	102	111	128	138	156	178	266	332
A	mm	47	51,5	61	64,5	78	87	104,5	115	137	159	201,5	288
C	mm	15,5	15,5	17	15	24,5	25	25	28,5	34,5	34	51,5	68
T	mm	9	9	11	11	13	13	18	18	22	22	30	28
E	mm	10	10	12	12	16	16	20	20	24	24	42	42
F	mm	7	7	8	8	10	10	14	14	18	18	30	30
ØN	mm	32	32	42	42	50	50	70	70	102	102	125	125
B		4 X M5	4 X M5	4 X M5	4 X M5	4 X M6	4 X M6	4 X M8	4 X M8	4 X M10	4 X M10	4 X M12	4 X M12
Kv	mm	16,3	29,5	43	89	230	265	540	873	1390	1707	2024	2720
PN	bar	16	16	16	16	16	16	16	16	16	16	16	16
GW	kg	1,30	1,90	2,20	3,30	4,20	6,10	10,00	13,50	20,90	37,50	61,50	104,00