


Flansch-Kugelhahn aus Grauguss mit vollem Durchgang, Baulängen ab EN 558 basic serie 14 (DN 200 basic serie 27), TA-Luft

1	Body	Gehäuse	G250
2	End connection	Ring	ASTM A105
3	Ball	Kugel	OT 58
4	Ball seat	Kugeldichtung	P.T.F.E
5	Ring	O-Ring	Buna
6	Thrust washer	Spindelscheibe	P.T.F.E
7	Ring	O-Ring	Buna
8	Stem seat	Spindeldichtung	P.T.F.E
9	Packing gland	Vorspannring	AVP-9SMNPB36
10	End stop	Anschlagscheibe	INOX AISI 430 & UNI 7070
11	Spring washer	Tellerfeder	UNI 3545
12	Nut	Mutter	UNI 5771
13	Stem	Spindel	INOX AISI 304
14	Handle	Handhebel	FE 360B
15	Handle DN 150-200	Handhebel DN 150-200	UNI 7230
16	VIS	Schraube	UNI 7356
17	VIS	Schraube	UNI 7356
18	Body handle DN 150-200	Hebelaufnahme DN 150-200	GG 25 UNI 5007

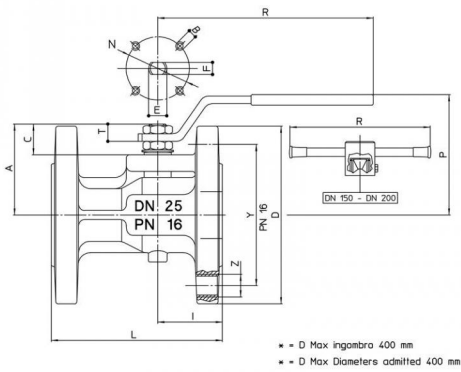

D		115	140
Y		85	100
Z		4xM12	4xM16
I		42	47
L		125	130
R		174.5	174.5
P		79	85.5
A		59	64.5
C		19.5	18.5
T		11.5	10.5
E		12	12
F		8	8
N			
B			
PN		16	16
KG		3.1	4.8